

Affordable, high temperature short wavelength pyrometer for non-contact temperature measurement of metals between 250 and 1800°C

IGA 15 plus



- Easy to handle
- Large illuminated LC display
- Laser aiming
- Built-in data logger
- Long temperature range
- High accuracy
- Fast temperature detection, only 20 ms
- Measurement of smallest objects from 1.25 mm
- Integrated additional functions
- USB interface
- Analyzing software *PortaWin* (option)



The **IGA 15 plus** is a robust, digital and accurate pyrometer with built-in data logger (750 values) for non-contact temperature measurement on metals, ceramics, graphite etc. with a temperature range of 250 - 1800°C.

The instrument is equipped with a laser targeting light. The size of the laser spot has approximately the size of the measuring spot.

The instrument has a maximum value storage, minimum value storage, average and difference function as well as an acoustic alarm.


The high quality optics enables the measurement of small objects from 4 mm, in combination with the close-up lens even from 1.25 mm.

With the short exposure time of only 20 ms even fast moving objects can be measured exactly.

Typical applications:


- preheating, tempering, hardening, normalizing
- forging, brazing
- sintering
- welding, rolling
- founding

Standard optics

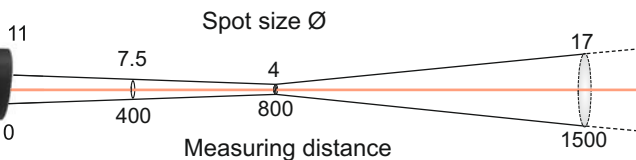

All dimensions in mm

With close-up lens

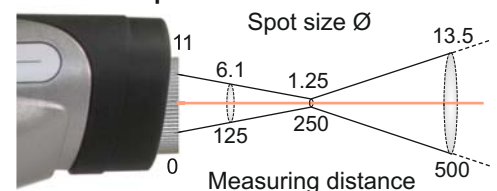

Technical Data

Temperature range:	250 - 1800°C
Spectral range:	1.45 - 1.8 µm
Detector:	InGaAs detector
Accuracy:	0.6% of measuring value ($T_{amb.} = 23^{\circ}\text{C}$, $\epsilon = 100\%$)
Repeatability:	0.2% of measuring value
Temperature coefficient:	0.01% of measuring value in °C per °C deviation of ambient temperature of 23°C
Exposure time t_{90} :	20 ms (with dynamical adaptation at low signal levels)
Emissivity ϵ :	10 - 100%, adjustable in 1% steps
Temperature display:	3 values / s
Temperature resolution:	On the display: 0.1°C (°F) from 250 to 999.9°C (482...999.9°F), 1°C from 1000 to 1800°C (1000...3272°F) via interface: 0.1°C or 0.1°F
Display illumination:	automatically adjusting to ambient light conditions
Measuring unit:	°C / °F, switchable
Measuring functions:	Display of maximum or minimum or average or difference value (MAX, MIN, AVG, DIF)
Alarm function:	Adjustable acoustic alarm (HI)
Data logger:	750 values; readable at pyrometer: temp. value with storage number; readable via interface: value with storage number, time, date, emissivity, unit, max. and min value of the measurement series
Storage function:	Manual data logging via push button or automatic logging in adjustable time intervals [s]: 0.02; 0.04; 0.1; 0.2; 0.5; 1; 2; 5; 10; 20; 50
Serial interface:	USB 2.0
Power supply:	9 V battery (IEC 6LR61) or 9 V-NiMH rechargeable battery (e.g. Varta type 5622)
Battery operation time:	50 hours with 9 V battery (without laser and display illumination) 15 hours with 9 V rechargeable battery (without laser and display illumination)
Charging connector:	For IMPAC battery charging unit 3 858 490
Laser targeting light	Laser class 2, max. laser power level < 1 mW, $\lambda = 650 \text{ nm}$
Operating temperature:	0 - 60 °C
Storage temperature:	-20 - 70 °C
Rel. humidity:	Non condensing conditions
Housing:	ABS
Weight:	340 g
Fixing thread:	Photo tripod thread 1/4" - 20 UNC
Protection class:	IP20
CE-label:	According to EU directives about electromagnetic immunity

Reference numbers

3 887 520 IGA 15 plus (scope of delivery: instrument, battery, carrying case, inspection sheet, user manual.)

Accessories:

3 749 150	NiMH rechargeable battery 9 V	3 858 520	Belt bag
3 858 540	Universal battery charger for 9 V batteries	3 858 570	CD with analyzing software PortaWin and USB cable
3 858 490	Battery charger with charging connector		
3 858 550	Close-up lens	3 858 580	USB cable

Overview Accessories



Belt bag




Close-up lens



Battery charger for the charging connector of the pyrometer



CD PortaWin and USB cable



Screenshot PortaWin

LumaSense Technologies

Americas and Australia

Sales & Service

3301 Leonard Court
Santa Clara, CA 95054

Tel.: +1 408 727-1600

Fax: +1 408 727-1677

info@lumasenseinc.com

Europe, Middle East, Africa

Sales & Service

D-60326 Frankfurt, Germany
Kleyerstr. 90

Tel.: +49 69 97373-0

Fax: +49 69 97373-167

India

Sales & Support Center

Mumbai, India

Tel.: +91 22 67419203

Fax: +91 22 67419201

China

Sales & Support Center

Shanghai, China

Tel.: +86 21 5882 2277

Fax: +86 21 5887 0077

Visit lumasenseinc.com for local sales representation